


The TAP06-000-PD-BF-CKL Plasterboard range of Access Panels are simple to install and suitable for ceilings & walls where regular maintenance to services is required.

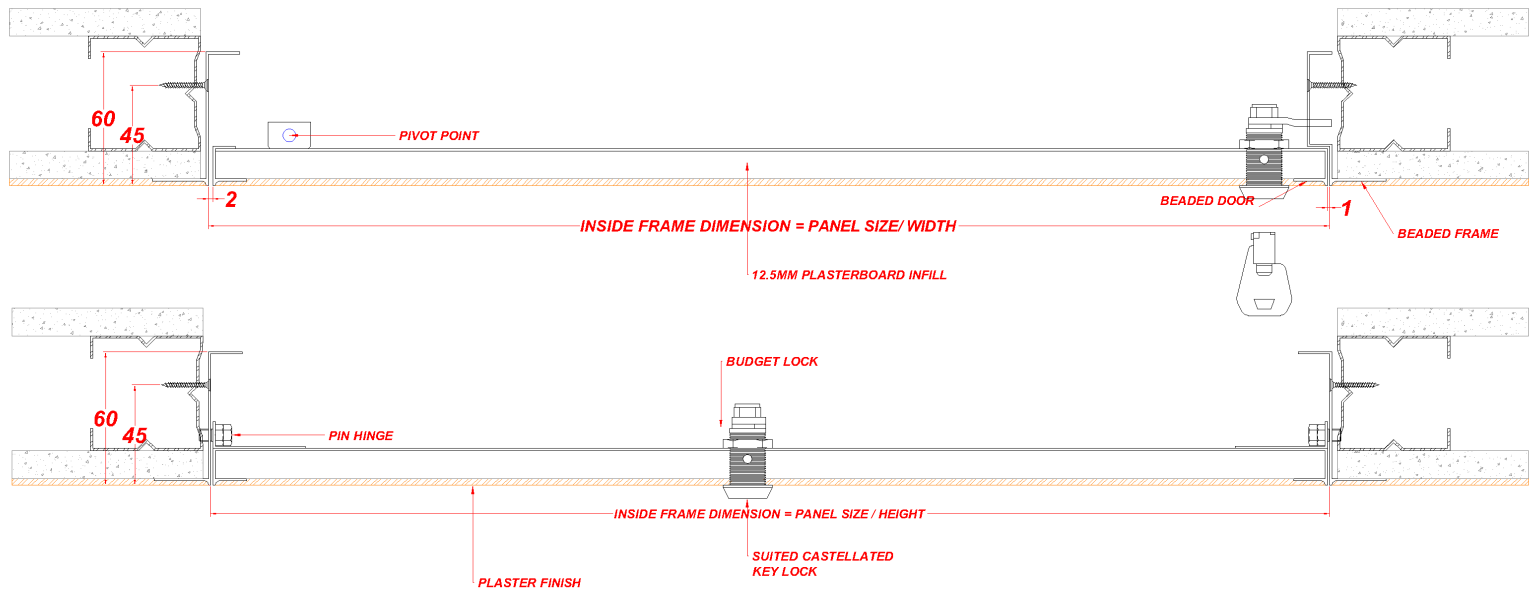

Description

The TAP06-000-PD-BF-CKL is manufactured with a Beaded frame and Door for tape and jointing / skim-coat plastering. The panel has a Plasterboard faced door for tape and jointing / skim-coat plastering. The panels door leaf is locked in place via a Suited Castellated Tamper Proof Key lock as standard other lock options are available upon request. The Panel is Powder Coated RAL 9010 30% Gloss.

Tests

The Panel is Non Fire rated
 The Panel is not acoustic rated
 The Panel is not Air Pressure tested.
 The Panel is not Smoke Tested.

Seals

Draught Seals **NO** Smoke Seals **NO** Air Seals **NO** Acoustic Seals **NO** Intumescent Seals **NO**

Construction

The TAP06-000-PD-BF-CKL is manufactured from Zintec Steel with a 0.9mm thick Door and a 0.9mm thick Frame. The panels door leaf is hinged on a pin hinge. This panel is available up to 600x600mm in a wall application & 600x600mm in a ceiling application.

Fitting

Make sure the structural opening is at least 7mm larger than the panel size, back of frame size. E.G a 600x600mm panel size requires a 607x607mm hole size. Remove the door from the frame and place the frame into the set hole. Fix through the appropriate fixing holes within the frame ensuring the frame is pushed up against the structural opening surround. Check the frame is square by measuring corner to corner. Refit door and lock in place; the door and frame should be flush. Independent bracing or support may be required to take the weight of the Access Panel. (Please note that it is important that prior to applying the plaster skim coat, a joint filler and a scrim tape is applied over the junction between the beaded frame and the plasterboard in order to prevent cracking of the skim coat)

Need Any more Help or Advice?

Contact us on:

Tel: 01922 500 145

Email: sales@tradeaccesspanels.co.uk